


SPECIALIZED 2019-2020

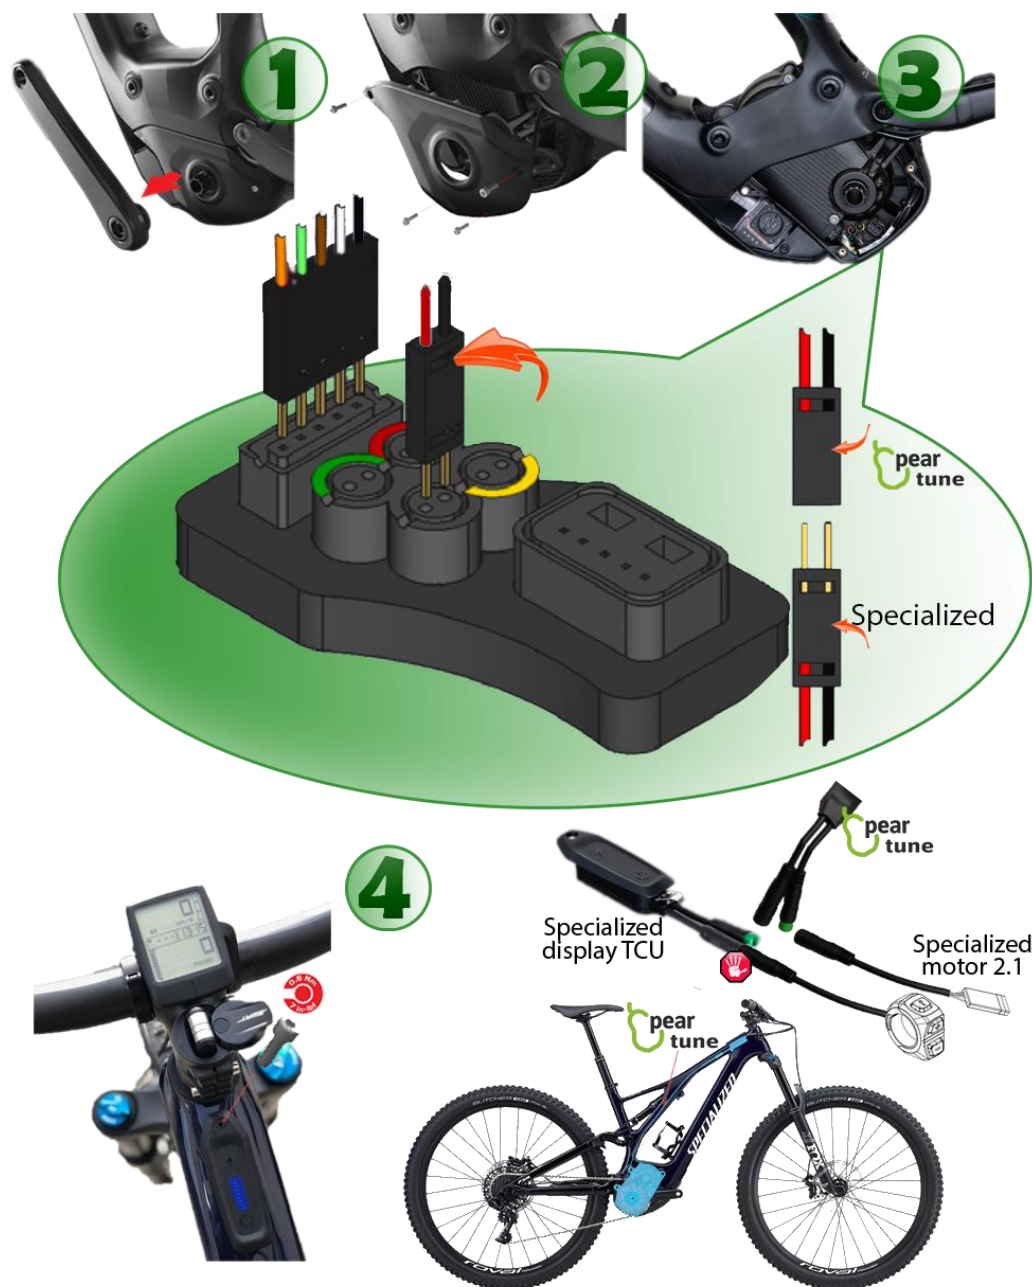

1. First, release the pedal cranks (50Nm). Fig.1

2. Remove the four engine cover bolts. Fig.2

3. Disconnect the connector from the speed sensor under the engine cover. Fig.3

4. Disconnect the display and connect the PearTune MSO to the green DIN connectors. Fig.4. Pass the 2-pin (speed sensor) connectors from PearTune MSO frame from the display to the motor connector and connect them according to Fig. 3

5. Replace the engine cover, pedal crank and display.

6. Switch on PearTune MSO by briefly pressing the "walk-assist" button. PearTune MSO activity is shown on the display by briefly displaying 9km/h.

7. Turn off the PearTune MSO again by briefly pressing the "walk-assist" button. The display briefly shows 2km/h.